

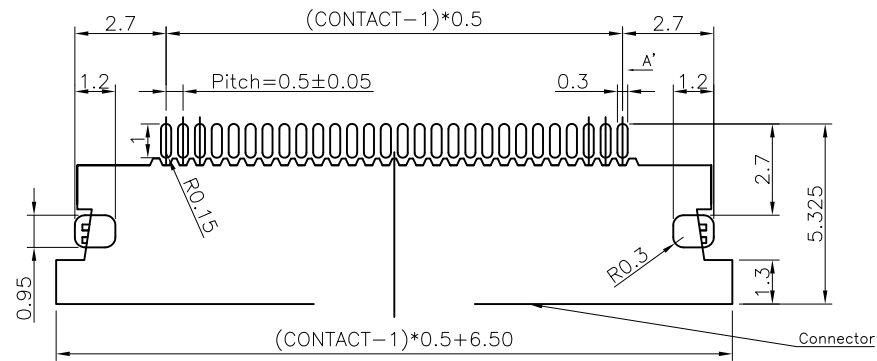


SYM.	DATE	DESCRIPTION OF REVISIONS	DRAWN	APPD
△				

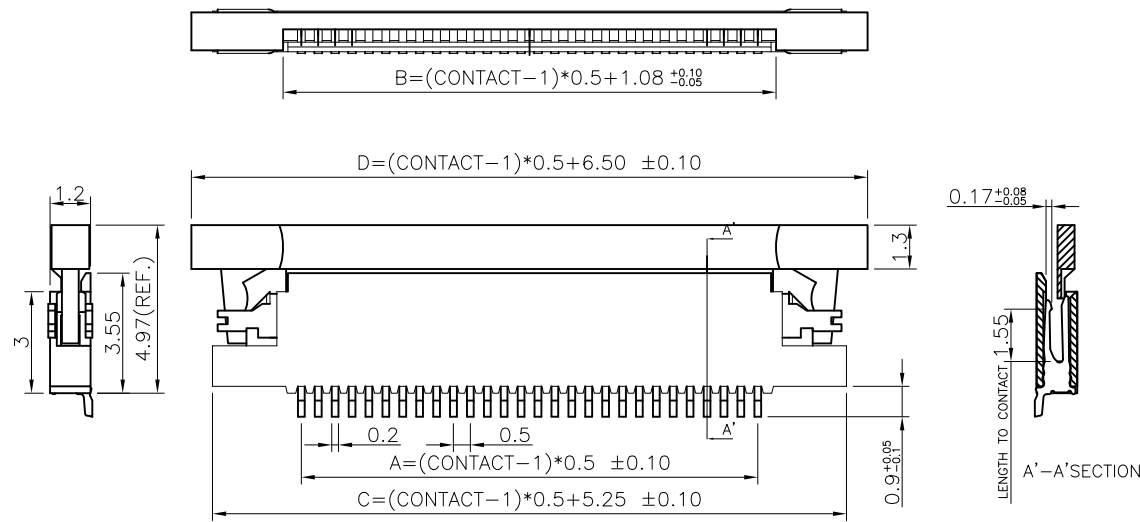

PCB Layout
↑
FPC/FFC INSERT DIRECTION

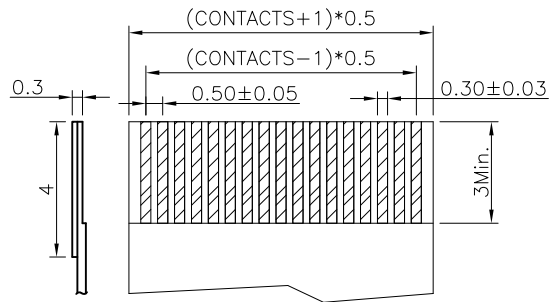

FFC/FFC DIMENSION
THICKNESS 0.30 mm

Electrical Characteristics:
 Current rating: 0.4A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C ~ +85°C
 Withstand Voltage: 200V AC/Minute
 Contact Resistance: 20m Ω MAX.
 Insulation resistance: 50M Ω MIN.
 Relative Humidity: 93%+40°C
Material Description:
 Conductor: Phoapohor Bronze Tin-Plated
 Holddown: Brass Tin-Plated
 Housing: Thermoplastic
 Slider: Thermoplastic

PIN	A	B	C	D	PIN	A	B	C	D
4	1.50	2.58	6.75	8.00	27	13.00	14.08	18.25	19.50
5	2.00	3.08	7.25	8.50	28	13.50	14.58	18.75	20.00
6	2.50	3.58	7.75	9.00	29	14.00	15.08	19.25	20.50
7	3.00	4.08	8.25	9.50	30	14.50	15.58	19.75	21.00
8	3.50	4.58	8.75	10.00	31	15.00	16.08	20.25	21.50
9	4.00	5.08	9.25	10.50	32	15.50	16.58	20.75	22.00
10	4.50	5.58	9.75	11.00	33	16.00	17.08	21.25	22.50
11	5.00	6.08	10.25	11.50	34	16.50	17.58	21.75	23.00
12	5.50	6.58	10.75	12.00	35	17.00	18.08	22.25	23.50
13	6.00	7.08	11.25	12.50	36	17.50	18.58	22.75	24.00
14	6.50	7.58	11.75	13.00	37	18.00	19.08	23.25	24.50
15	7.00	8.08	12.25	13.50	38	18.50	19.58	23.75	25.00
16	7.50	8.58	12.75	14.00	39	19.00	20.08	24.25	25.50
17	8.00	9.08	13.25	14.50	40	19.50	20.58	24.75	26.00
18	8.50	9.58	13.75	15.00	41	20.00	21.08	25.25	26.50
19	9.00	10.08	14.25	15.50	42	20.50	21.58	25.75	27.00
20	9.50	10.58	14.75	16.00	43	21.00	22.08	26.25	27.50
21	10.00	11.08	15.25	16.50	44	21.50	22.58	26.75	28.00
22	10.50	11.58	15.75	17.00	45	22.00	23.08	27.25	28.50
23	11.00	12.08	16.25	17.50	46	22.50	23.58	27.75	29.00
24	11.50	12.58	16.75	18.00	47	23.00	24.08	28.25	29.50
25	12.00	13.08	17.25	18.50	48	23.50	24.58	28.75	30.00
26	12.50	13.58	17.75	19.00	49	24.00	25.08	29.25	30.50
27	13.00	14.08	18.25	19.50	50	24.50	25.58	29.75	31.00

TOLERANCES OTHERWIES SPECIFIED	
.000	±0.05
.00	±0.25
.0	±0.38
0.	±0.5
ANGLE	±1.0°
3RD. ANGLE	UNIT % _m
APPROVE	JEMI 03/11"08
DESIGNED	JET 03/11"08

HAMBURG INDUSTRIES CO., LTD.

Tel: 886-2-2662-8882; Fax: 886-2-2662-7201; <http://www.hamburg.com.tw>

PART NO. SFxxSC-01SLT00 MODEL NO.

FPC/FFC Connector, xxPIN, 霧錫
LOWER, H=1.2mm, SMT P=0.5 LOWER

TILTE

DRAWING NO.

SIZE A4 SCALE 1/1 SHEET 1 OF 1